



US007209620B2

(12) **United States Patent**
Prasad et al.

(10) **Patent No.:** **US 7,209,620 B2**
(45) **Date of Patent:** **Apr. 24, 2007**

(54) **DISPERSION OPTIMIZED FIBER HAVING HIGHER SPOT AREA**

(75) Inventors: **Shashikant Prasad**, Maharashtra (IN);
Sthitadhi Das, Maharashtra (IN);
Nageswaran Senthil Kumar,
Maharashtra (IN); **Sanjeet Bhatia**,
Maharashtra (IN); **Salaj Sinha**,
Maharashtra (IN); **Pankaj Khanna**,
Maharashtra (IN)

6,134,367	A *	10/2000	Jones et al.	385/124
6,212,322	B1 *	4/2001	Ma et al.	385/123
6,400,877	B1 *	6/2002	Kato et al.	385/123
6,421,490	B1 *	7/2002	Liu	385/127
6,442,320	B1 *	8/2002	Danziger et al.	385/123
6,445,864	B2 *	9/2002	Jiang et al.	385/127
6,477,306	B2 *	11/2002	Kato et al.	385/123
6,498,887	B1 *	12/2002	Gruner-Nielsen et al.	385/123

(Continued)

(73) Assignee: **Sterlite Optical Technologies Limited**,
Aurangabad, Maharashtra (IN)

FOREIGN PATENT DOCUMENTS

WO WO 02/088803 A2 * 11/2002

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

Primary Examiner—Frank G. Font
Assistant Examiner—Ryan Lepisto
(74) *Attorney, Agent, or Firm*—Ladas & Parry LLP

(21) Appl. No.: **10/763,403**

(57) **ABSTRACT**

(22) Filed: **Jan. 22, 2004**

A dispersion optimized fiber having higher spot area comprising a center core region, a cladding region, a ring core region and an outer glass region is provided, wherein the cladding is provided onto the outer periphery of the center core, and the ring core is provided onto the outer periphery of the cladding, and the outer glass region surrounds the ring core region, and the center core and the ring core have refractive indices higher than the outer glass region and the cladding region has lower refractive index than the outer glass region, and the refractive indices are constrained by the equation $n_1 > n_3 > n_4 > n_2$. In accordance with the preferred embodiment, the cladding region is divided into two regions—inner cladding region and an outer cladding with the ring core disposed therebetween, wherein the inner cladding is provided onto the outer periphery of the center core, and the ring core is provided between the inner cladding and the outer cladding is provided onto the outer periphery of the ring core, and the outer glass region surrounds the outer cladding, and the refractive indices are constrained by the equation:

(65) **Prior Publication Data**

US 2005/0058418 A1 Mar. 17, 2005

(30) **Foreign Application Priority Data**

Jan. 27, 2003 (IN) 96/MUM/2003

(51) **Int. Cl.**
G02B 6/02 (2006.01)
G02B 6/16 (2006.01)
G02B 6/18 (2006.01)
G02B 6/22 (2006.01)

$$n_1 > n_3 > n_5 > n_2 = n_4.$$

(52) **U.S. Cl.** **385/129**; 385/123; 385/124;
385/126; 385/127


(58) **Field of Classification Search** 385/128
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,852,968	A *	8/1989	Reed	385/127
5,361,319	A *	11/1994	Antos et al.	385/123
5,905,838	A *	5/1999	Judy et al.	385/123

19 Claims, 6 Drawing Sheets

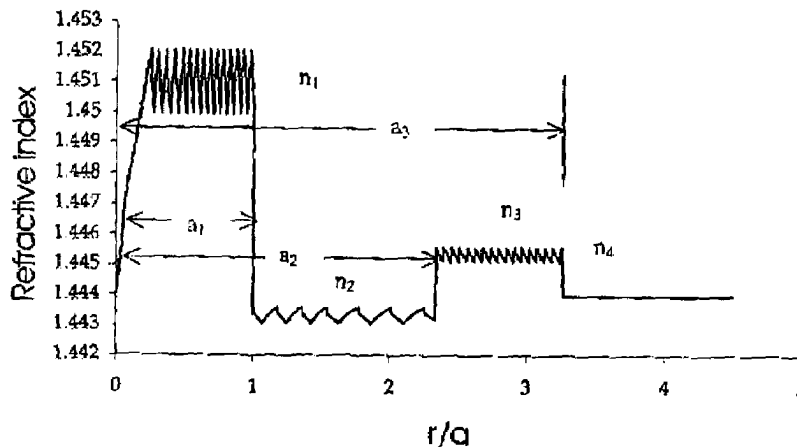

US 7,209,620 B2

Page 2

U.S. PATENT DOCUMENTS

6,587,627 B2 *	7/2003	Saitou et al.	385/127	2002/0164139 A1 *	11/2002	Saitou et al.	385/127
6,650,814 B2 *	11/2003	Caplen et al.	385/127	2003/0113084 A1 *	6/2003	Knudsen et al.	385/127
6,879,764 B2 *	4/2005	Changdar et al.	385/127	2003/0133678 A1 *	7/2003	Mukasa	385/123
6,904,217 B2 *	6/2005	Kalish et al.	385/127	2003/0156809 A1 *	8/2003	Tsukitani et al.	385/123
2002/0001444 A1 *	1/2002	Hirano et al.	385/123	2003/0169988 A1 *	9/2003	Matsuo et al.	385/127
2002/0054743 A1 *	5/2002	Montmorillon et al.	385/124	2003/0185531 A1 *	10/2003	Lysiansky et al.	385/127
2002/0067903 A1 *	6/2002	Fleury et al.	385/123	2004/0028359 A1 *	2/2004	Tirloni et al.	385/123
2002/0076186 A1 *	6/2002	de Montmorillon et al.	385/123	2004/0067034 A1 *	4/2004	Rosenblum et al.	385/127

* cited by examiner